

## Description

The S2 series high resolution optical shaft encoder is a non-contacting rotary to digital converter. Useful for position feedback or manual interface, the encoder converts real-time shaft angle, speed, and direction into TTL-compatible quadrature outputs with or without index. The encoder utilizes an unbreakable mylar disk, metal shaft and bushing, LED light source, and monolithic electronics. It operates from a single +5VDC supply.

The S2 is our first generation ball bearing optical shaft encoder and is available for those customers who have designed it into their products; however, the S6 is recommended for new designs in place of the S2.

The S2 is normally designed for applications of 6 feet or less. For longer cable lengths, adding a PC4 / PC5 differential line driver is recommended.

Three shaft torque versions are available. The standard torque version has a sleeve bushing lubricated with a viscous motion control gel to provide torque and feel that is ideal for front panel human interface applications.

The no torque added option has a sleeve bushing and a low viscosity lubricant (that does not intentionally add torque) for low RPM applications where a small amount of torque is acceptable.

The ball bearing version uses miniature precision ball bearings that are suitable for high speed and ultra low torque applications.


Connection to the S2 series encoder is made through a 5-pin standard connector (sold separately). The mating connectors are available from US Digital with several cable options and lengths.

## Mechanical Drawing



## Features

- ▶ Small size
- ▶ Low cost
- ▶ 2-channel quadrature, TTL square wave outputs
- ▶ 3rd channel index option
- ▶ Tracks from 0 to 100,000 cycles/sec
- ▶ Ball bearing option tracks to 10,000 RPM
- ▶ -40 to +100C operating temperature
- ▶ Single +5V supply

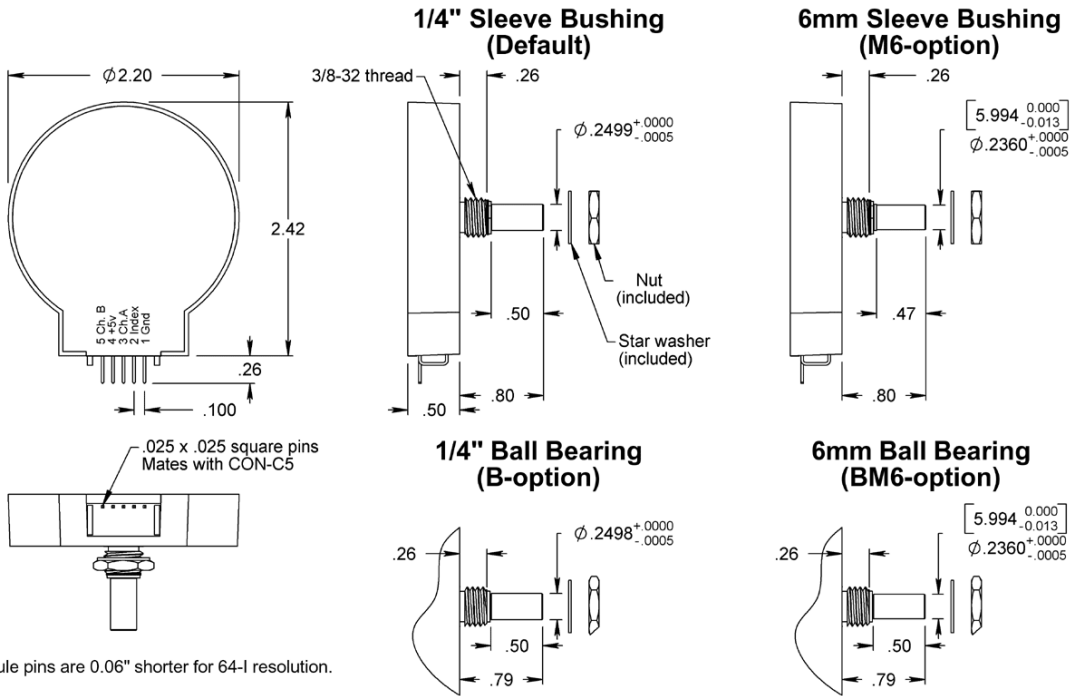

> Module pins are 0.06" shorter for 64-l resolution.

**Mechanical**

Parameter	Sleeve Bushing	Ball Bearing
Acceleration	250,000 rad/sec <sup>2</sup>	250,000 rad/sec <sup>2</sup>
Vibration	20 g. 5 to 2KHz	20 g. 5 to 2KHz
Shaft Speed	100 RPM max. continuous	10,000 RPM max. continuous
Shaft Rotation	Continuous and reversible	-
Shaft Torque	0.5 ±0.2 in. oz. 0.3 in. oz. max. (N-option)	0.05 in. oz. max.
Shaft Loading	2 lbs. max. dynamic 20 lbs. max. static	1 lb. max.
Bearing Life	-	(40/P) <sup>3</sup> = life in millions of revs. where P = radial load in pounds
Weight	1.28 oz.	1.28 oz.
Shaft Runout	0.0015 T.I.R. max.	0.0015 T.I.R. max.

**Phase Relationship**

B leads A for clockwise shaft rotation, and A leads B for counterclockwise rotation viewed from the shaft side of the encoder (see the EM1 / HEDS page).

**Electrical**

- Specifications apply over entire operating temperature range.
- Typical values are specified at Vcc = 5.0Vdc and 25 ° C.
- For complete details see the EM1 and HEDS product pages.

Resolution	Supply Current	Output voltage low	Output voltage high	Based on
	Typ / Max	Max	Min	
1000, 1024 CPR, non-index	17 / 40 mA	0.4 volts @ 3.2mA	2.4 volts @ -200uA	Low-res HEDS
2000, 2048 CPR, non-index	57 / 85 mA	0.5 volts @ 8mA	2.4 volts @ -40uA	High-res HEDS
64 CPR, with index	27 / 30 mA	0.5 volts @ 8mA	2.0 volts @ -8mA	EM1
1000, 1024 CPR, with index	57 / 85 mA	0.5 volts @ 8mA	2.4 volts @ -40uA	High-res HEDS
2000, 2048 CPR, with index	57 / 85 mA	0.5 volts @ 8mA	2.4 volts @ -40uA	High-res HEDS
2500 CPR, with index	55 / 57 mA	0.5 volts @ 8mA	2.0 volts @ -8mA	EM1

### Pin-out

Pin	Description
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

### Ordering Information

<b>S2</b> -	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
	<b>CPR</b>		<b>Shaft</b>		<b>Index</b>		<b>Torque</b>		<b>Housing</b>
	64		236 =6mm dia. sleeve bushing (standard torque)		N =No Index		D =Default		D =Default
	1000				I =Index (3rd Channel)		B =Ball Bearing		S =Sealed Housing
	1024		250 = 1/4"				N =No Torque Added		
	2000								
	2048								
	2500								

### Rules

- Index must be equal to I when CPR is 64 or 2500

### Notes

- Cables and connectors are not included and must be ordered separately.
- For ordering information please see the Compatible Cables / Connectors section above.
- US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

### Pricing

Quantity	Price
1	\$58.95
10	\$50.79
50	\$44.88
100	\$41.87

- Add \$1.00 per unit for **Shaft** of 6mm dia. sleeve bushing (standard torque)
- Add \$5.80 per unit for **Torque** of Ball Bearing
- Add \$14.00 per unit for **Housing** of Sealed Housing
- Add 17% per unit for **Index** of I or **CPR** greater than or equal to 2000.